

● 主要数据 Main technical data:

认证 Certification | 防爆标志 Ex mark | 符合标准 Meet the standard

China (PCEC Ex)	Ex e II Gb DIP A21	GB3836 GB12476
IECEX		IEC60079
ATEX		EN60079

适用范围: 用于 1 区和 2 区
用于 21 区和 22 区

Intended use: Can be used in zone 1 and zone 2
Can be used in zone 21 and zone 22

防护等级: IP54
材 料: 尼龙塑料



Degree of protection: IP54
Material: nylon plastic

● 订购规格 Order specifications:

图 样 Illustration	编码 Code	入口螺纹 Entry thread	螺纹长度 Length of thread	订购号 Order No.
	M01	M25 × 1.5	15	CZ0527 2515 e001


B

● 外形尺寸 Outline dimensions:

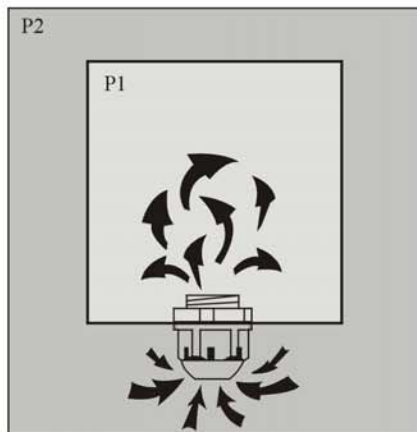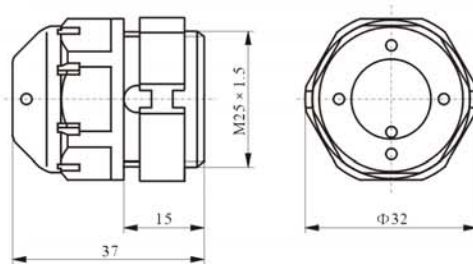

在外壳内部 (P1) 与外部大气 (P2) 之间, 随温度变化的压力差额通过增安型呼吸、排流阀使它们可靠相等, 外壳内形成的凝露保持最小化。

Temperature-dependent pressure differences between the interior of an enclosure (P1) and the external atmosphere (P2) are reliably equalized by means of the breathing gland. Condensation build-up in the enclosure is thus kept to a minimum.

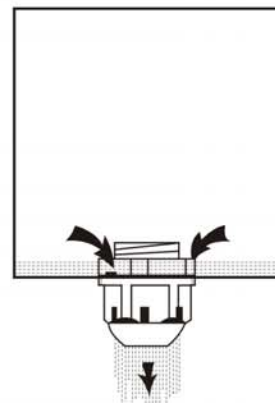

已渗透到设备内的水通过增安型呼吸、排流阀可以流出。

Water which has already penetrated the equipment can flow away via the breathing gland.