

**主要数据 Main technical data:**

防爆标志: Ex emb II

适用范围: 用于 1 区和 2 区

电表机构: 电磁式

精度: 1.5 级

 接线端子:  $2 \times 2.5\text{mm}^2$ 

板前导轨型安装: 导轨 TS35 × 7.5 或螺钉固定

板后型安装: 在 1-6mm 面板上

环境温度



Ex mark: Ex emb II

Intended use: Can be used in zone 1 and zone 2

Ammeter framework: Electromagnetic

Accuracy class: 1.5

 Terminals:  $2 \times 2.5\text{mm}^2$ 


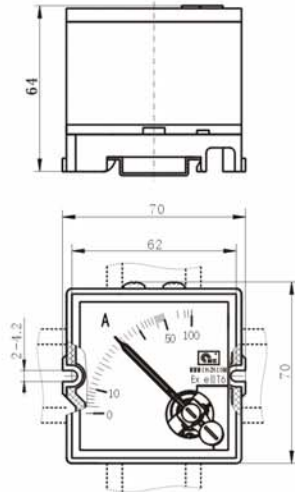
Board front mounting rail type mounting: May be held on mounting rails TS35 × 7.5 or with screws

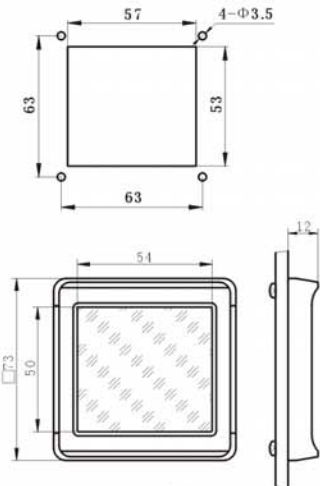
Board back type mounting: On 1-6mm panel

**订购规格 Order specifications:**


表框 Calotte	型式 Type	规格(AC) Specification	订购号(编码) Order No.(Code)
EXM	电流表 Ammeter	0-20/40mA 4-20/40mA	M□mA 11 M□mA 12
	电压表 Voltmeter	0-25V 0-40V 0-150V 0-250V 0-500V	M□V 25 M□V 40 M□V 150 M□V 250 M□V 500

 6 — 板前导轨型 Board front mounting rail type  
 7 — 板后型 Board back type

**外形尺寸 Outline dimensions:**

 CZ0205 板后型防爆电表模块  
 CZ0205 Board back type explosion-proof ammeter module

 CZ0205 板前导轨型防爆电表模块  
 CZ0205 Board front mounting rail type explosion-proof ammeter module

**开孔尺寸 Aperture dimensions**

 EXM 表框  
 EXM Calotte